WDM-2-MkII

2-channel WDM

(Wave length Division Multiplexer)

Single mode

User manual

Rev. 0

Nevion Support

Nevion Europe

P.O. Box 1020
3204 Sandefjord, Norway
Support phone 1: +47 33 48 99 97
Support phone 2: +47 90 60 99 99

Nevion USA

1600 Emerson Avenue
Oxnard, CA 93033, USA
Toll free North America: (866) 515-0811
Outside North America: +1 (805) 247-8560

E-mail: support@nevion.com
See http://www.nevion.com/support/ for service hours for customer support globally.

Revision history

Current revision of this document is the uppermost in the table below.

Rev.	Repl.	Date	Sign	Change description
0	-	2012-05-23	MR	Initial version

Contents

Revision history 2
1 Product overview 4
2 Specifications 5
2.1 WDM-2 5
2.1.1 Optical 5
2.1.2 Electrical 5
3 Mounting the CWDM module into frame 6
4 Connections 9
5 Laser safety precautions 10
General environmental requirements for Nevion equipment 11
Product Warranty 12
Appendix A Materials declaration and recycling information 13
A.1 Materials declaration 13
A.2 Recycling information 13
EC Declaration of Conformity 14

1 Product overview

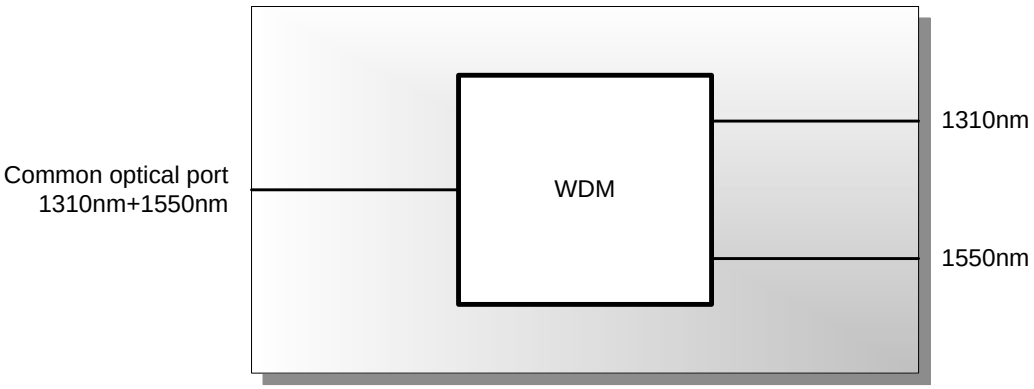

Figure 1 Block diagram of the WDM module operation

The Flashlink 2-Channel WDM is a wavelength division multiplexer / demultiplexer module. The unit is passive and there is no need for power or control. The WDM is bitrate and format transparent; meaning SDI, Ethernet and SDH/SONET is supported. The WDM can be used for uni- directional and bi-directional application.

The optical multiplexing is made for the 2nd and 3rd optical windows (1310nm and 1550nm).

The WDM has a 1310nm, a 1550nm and a combined WDM port allowing 2 optical signals to be multiplexed on a single fiber.

The product comes with 2 SC/UPC fiber patch cords to connect the modules together.

The product is available in the following versions:

WDM-2	2-Channel WDM SM

2 Specifications

2.1 WDM-2

2.1.1 Optical

Optical wavelength:	2nd & 3rd opt. window (1310nm & 1550nm)
Optical band pass:	1295-1325nm & 1535-1565nm
Transmission circuit fiber:	9/125um Single Mode
Connector:	SC/PC
	(Please be aware that SC/UPC is not an official standard though it is often used to specify better return loss parameters than SC/PC)
Return loss:	better than 40dB w/Single Mode fiber
Insertion loss:	< 2dB incl. connectors (<1,2dB typ.)
Isolation:	> 17dB
Directivity:	> 50dB

2.1.2 Electrical

Power:	None
Control:	None

3 Mounting the CWDM module into frame

The CWDM filter must be mounted in a Flashlink sub rack. This is done from the rear. Do not use force when inserting the CWDM filter. The module's main board has a special design to utilize both card rails in the FL sub rack. In order to enter the lower rail before sliding the unit into its final position, please follow the method shown in the pictures below.

(Please note that the pictures show a not relevant product with similar mechanical solution).

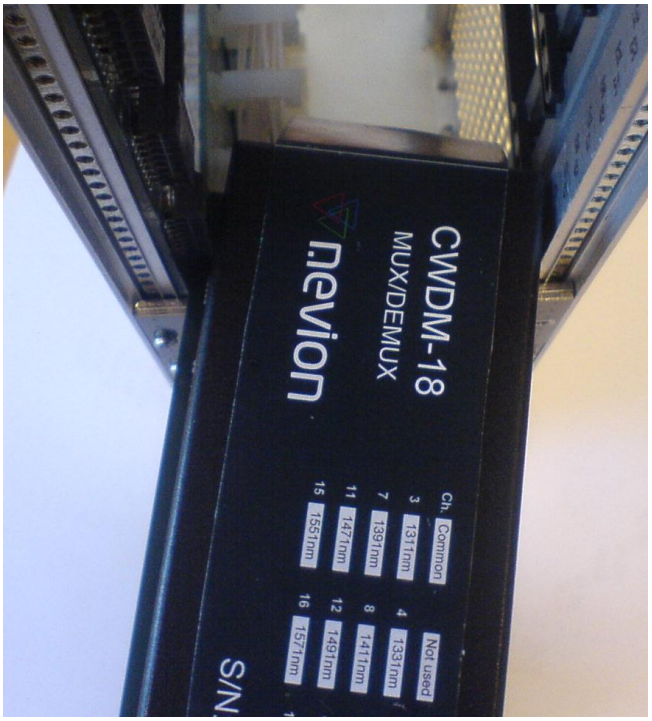

Figure 2 Enter the module with angle

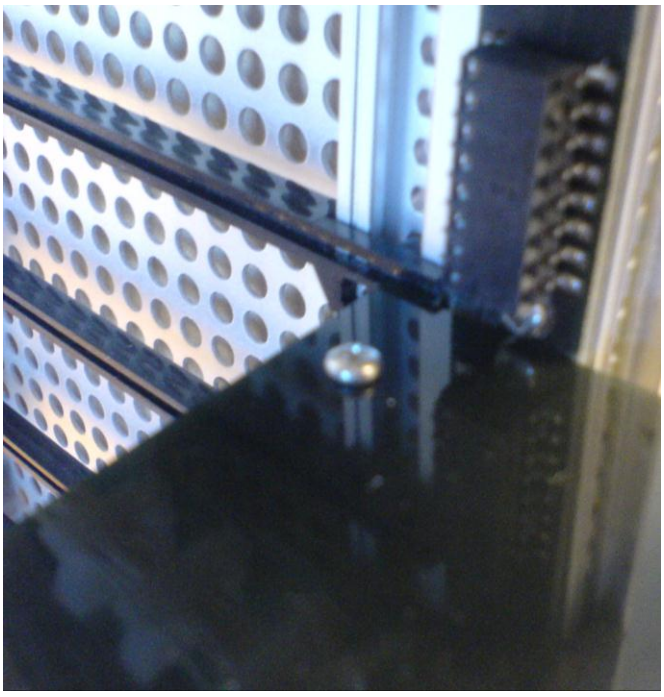

Figure 3 PCB tag inside the power bus PCB

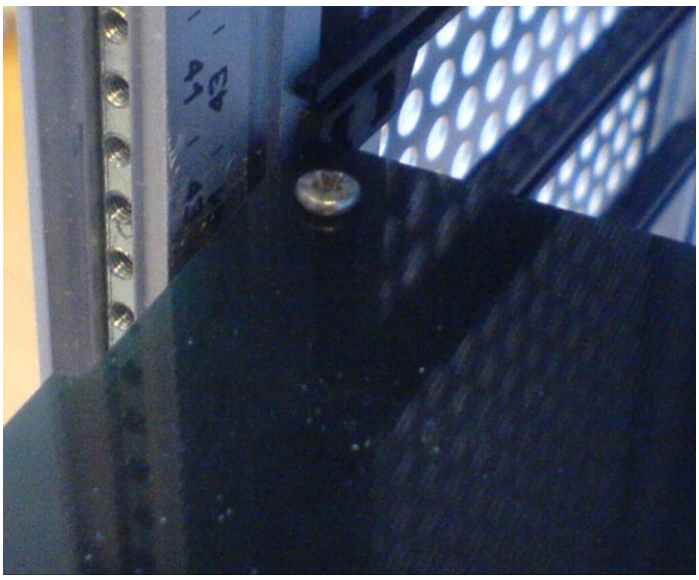

Figure 4 Opposite side of PCB tag

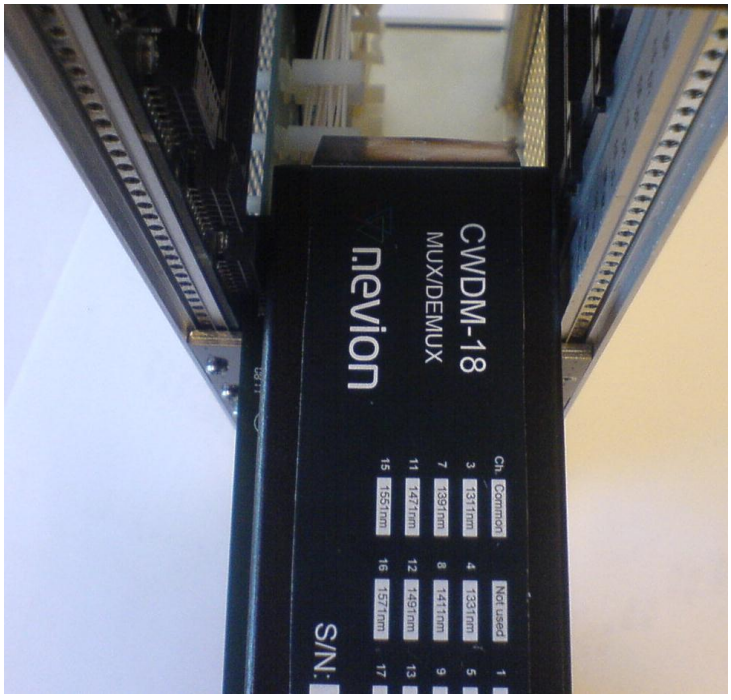

Figure 5 Adjust to normal position

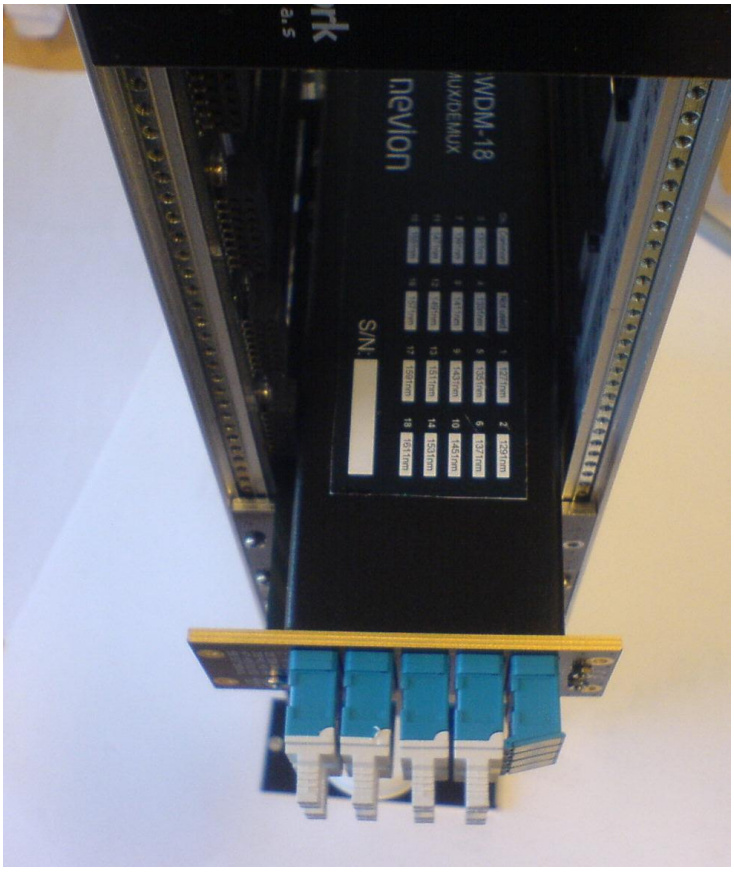

Figure 6 Slide the module to final position using both card rails

Figure 7 Module mounted in frame

4 Connections

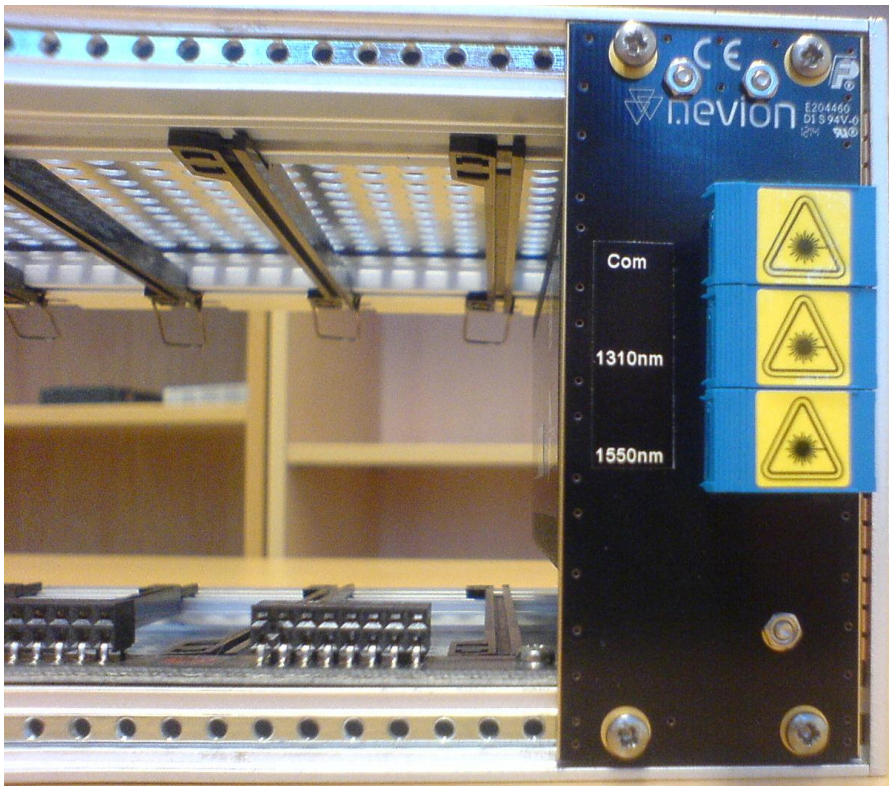

Figure 8 WDM-2 mounted in a Flashlink subrack

The WDM-2 is a self-contained module where the connector module is attached to the box protecting the optical component. The modules shall be mounted from the rear of the frame.

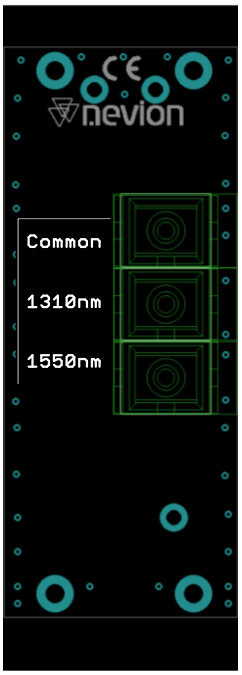

Figure 9 Overview of the connector module

5 Laser safety precautions

These are guidelines to limit hazards from laser exposure.

All the available EO units in the Flashlink range include a laser.

Therefore this note on laser safety should be read thoroughly even though there is no laser onboard this product.

The lasers emit light at wave lengths between 1271 nm and 1611 nm. This means that the human eye cannot see the beam, and the blink reflex cannot protect the eye. (The human eye can see light between 400 nm to 700 nm).

A laser beam can be harmful to the human eye (depending on laser power and exposure time). Therefore:

> Be careful when connecting / disconnecting fiber pigtails (ends).
>
> Never look directly into the pigtail of the laser/fiber.
>
> Never use microscopes, magnifying glasses or eye loupes to look into a fiber end.
>
> Use laser safety goggles blocking light between 1271 nm and at 1611 nm

Instruments exist to verify light output power: Power meters, IR-cards etc.

Flashlink features:

The FR-2RU-10-2 is classified as Class 1 laser product according to EN 60 825-1:94/A11:96, and CFR Ch1 (1997) Part 1040.10.

If the front panel is removed, the FR-2RU-10-2 is classified as Class 1 laser product according to EN 60 825-1:94/A11:96, and class IIIb according to CFR Ch1 (1997) Part 1040.10.

Maximum output power[1]: 17 mW

Operating wavelengths: > 1260 nm

[1] Max power is for safety analysis only and does not represent device performance.

General environmental requirements for Nevion equipment

1. The equipment will meet the guaranteed performance specification under the following environmental conditions:
   - Operating room temperature range: 0°C to 50°C
   - Operating relative humidity range: <90% (non-condensing)

2. The equipment will operate without damage under the following environmental conditions:
   - Temperature range: -10°C to 60°C
   - Relative humidity range: <95% (non-condensing)

Product Warranty

The warranty terms and conditions for the product(s) covered by this manual follow the General Sales Conditions by Nevion, which are available on the company web site:

www.nevion.com

Appendix A Materials declaration and recycling information

A.1 Materials declaration

For product sold into China after 1st March 2007, we comply with the “Administrative Measure on the Control of Pollution by Electronic Information Products”. In the first stage of this legislation, content of six hazardous materials has to be declared. The table below shows the required information.

組成名稱 Part Name	Toxic or hazardous substances and elements					
	鉛 Lead (Pb)	汞 Mercury (Hg)	镉 Cadmium (Cd)	六价铬 Hexavalent Chromium (Cr(VI))	多溴联苯 Polybrominated biphenyls (PBB)	多溴二苯醚 Polybrominated diphenyl ethers (PBDE)
WDM-2-Mkll	O	O	O	O	O	O
O: Indicates that this toxic or hazardous substance contained in all of the homogeneous materials for this part is below the limit requirement in SJ/T11363-2006. X: Indicates that this toxic or hazardous substance contained in at least one of the homogeneous materials used for this part is above the limit requirement in SJ/T11363-2006.						

This is indicated by the product marking:

A.2 Recycling information

Nevion provides assistance to customers and recyclers through our web site http://www.nevion.com/. Please contact Nevion’s Customer Support for assistance with recycling if this site does not show the information you require.

Where it is not possible to return the product to Nevion or its agents for recycling, the following general information may be of assistance:

- Before attempting disassembly, ensure the product is completely disconnected from power and signal connections.
- All major parts are marked or labeled to show their material content.
- Depending on the date of manufacture, this product may contain lead in solder.
- Some circuit boards may contain battery-backed memory devices.

EC Declaration of Conformity

MANUFACTURER	Nevion	
AUTHORIZED REPRESENTATIVE (Established within the EEA)	Not applicable	
MODEL NUMBER(S)	WDM-2-MkII	
DESCRIPTION	2 channel WDM	
DIRECTIVES this equipment complies with	Low voltage (EU Directive 2006/95/EC) EMC (EU Directive 2004/108/EC) RoHS (EU Directive 2002/95/EC) China RoHS[2] WEEE (EU Directive 2002/96/EC) REACH	
HARMONISED STANDARDS applied in order to verify compliance with Directive(s)	EN 55103-1:1996 EN 55103-2:1996 EN 60950-1:2006	
TEST REPORTS ISSUED BY	**Notified/Competent Body**	**Report no:**
	-	-
TECHNICAL CONSTRUCTION FILE NO	Not applicable	
YEAR WHICH THE CE-MARK WAS AFFIXED	2011	
TEST AUTHORIZED SIGNATORY		
MANUFACTURER	**AUTHORIZED REPRESENTATIVE (Established within EEA)**	**Date of Issue**
		2011-03-30
		Place of Issue
NEVION EUROPE AS O.nr. 976 584 201 MVA	Not applicable	Sandefjord, Norway
Name Thomas Øhrbom		
Position VP of Business Support Systems, Nevion (authorized signature)		

[2] Administration on the Control of Pollution Caused by Electronic Information Products

Nevion HQ:
Nevion Europe, P.O. Box 1020, 3204 Sandefjord, Norway
Tel: +47 33 48 99 99 – Fax: +47 33 48 99 98 – www.nevion.com